


► MIL-STD-1553B Adapter

The MIL-STD-1553B Adapter provides validated MIL-STD-1553B communications. They are extremely rugged, with a high MTBF and is available in the following industry standard compliant formfactors :

- PMC (IEEE Std 1386.1-2001)
- Conduction-Cooled PMC (CCPMC) (ANSI/VITA 20-2001)

Architecture

The MIL-STD-1553B Adapter makes use of a state-of-the-art high-speed ASIC design to minimise obsolescence problems. It employs industry standard MIL-STD-1553B transceivers and uses a validated 1553 protocol for maximum inter-operability.

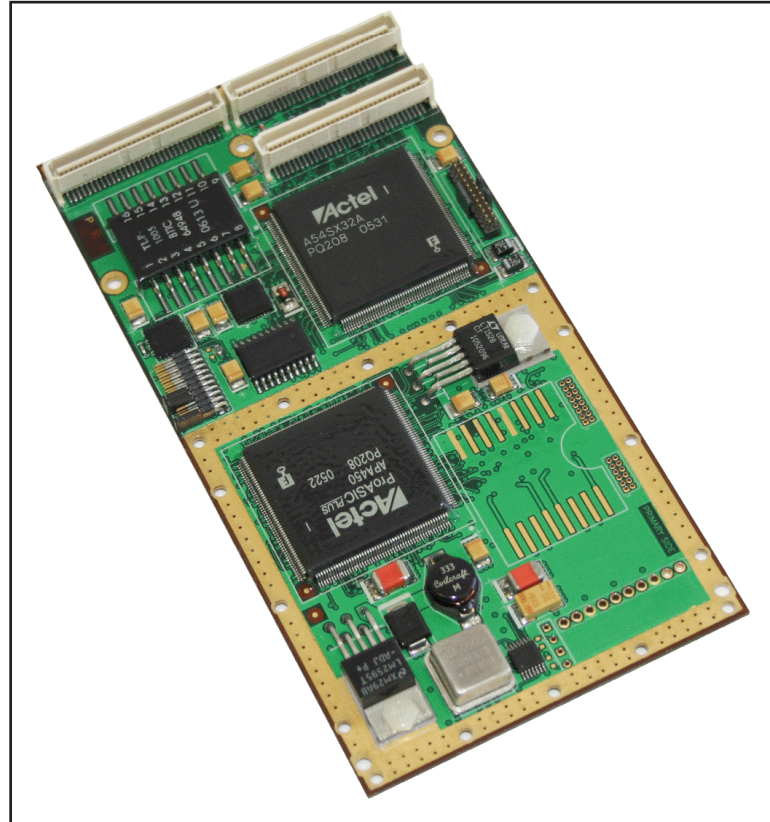

MIL-STD-1553B Conduction-Cooled PMC

Features

- Remote Terminal (RT) / Bus Controller (BC) / Bus Monitor (BM) options
- Validated MIL-STD-1553 protocol
- Comprehensive Built-In Test (BIT) and JTAG compatibility provide diagnostics that give confidence in subsystem integrity
- Transformer-coupled short or long stub coupling
- VxWorks drivers available
- Forced-air and conduction-cooled versions available
- Cost-effective

Applications

- Distributed real-time applications in harsh environments
- Mission-critical applications
- Avionics



► **MIL-STD-1553B Adapter**

Specifications	
Bus Interface	32-bit, 33 MHz Electrically : PCI Rev 2.2, 3,3 V signalling (5,0 V compatible)
I/O Addresses	Automatic assigned to the slot by PCI Rev. 2.2 Plug-and-Play
Interrupts	PCI INT A
I/O Options	PMC : Front Panel I/O, sub-miniature twinaxial connectors, 3 lug, "P" keying ("R", "W", "FL" or threaded keyring optional) CCPMC : Backplane PMC connector Pn4
Bit Rates	1 Mbit/s, in accordance with MIL-STD-1553B
Output	- Transformer-coupled I/O - Long or short stub coupling
Power	5,0 V at 0,8 A
Software Drivers	VxWorks
Options	Other software drivers are costed options Can be combined with other serial I/O, e.g. RS-232, RS-422/485, CANbus, Gigabit Ethernet, Fibre Channel, etc.

Reliability			
MTBF	Figures according to MIL-HDBK-217F, Parts Stress Method		
	Commercial and Industrial Grades	Ground Benign, Controlled, 25 C	100 000 hrs
	Ruggedised Grade	Ground, Mobile, 45 C Naval, Sheltered, 40 C Airborne, Inhabited Cargo, 55 C	20 000 hrs 28 000 hrs 21 000 hrs

Characteristics		
Formfactor	Dimensions	Mass
PMC (IEEE Std 1386.1-2001)	149,00 mm x 74,00 mm, conforming to CMC height envelope	TBD
CCPMC (ANSI/VITA 20-2001)	143,65 mm x 74,0 mm, conforming to VITA 20 height envelope	85 g +/- 10 g

MIL-STD-1553
Board-Level

MIL-STD-1553
Board-Level



► **MIL-STD-1553B Adapter**

Environmental Specifications			
	Commercial Grade	Industrial Grade	Ruggedised
Temperature - Operating - Storage	0 C to +55 C -40 C to +85 C	-15 C to +75 C -50 C to +85 C	-40 C to + 85 C -60 C to +125 C
Humidity	0% - 90%	0% - 95%	0% - 95%
Shock	N/A	30 g peak for 11 ms	40 g peak for 11 ms
Vibration - Sine - Random	2 g (peak) 10 Hz to 100 Hz 0,04 g²/Hz at 15 Hz to 2 kHz	10 g (peak) 5 Hz to 2 kHz 0,1 g²/Hz at 15 Hz to 2 kHz	10 g (peak) 5 Hz to 2 kHz 0,1 g²/Hz at 15 Hz to 2 kHz

Part Selector				
Part Designation	Formfactor	Grade	Attachment	Connector
CCII/1553/PMC/1/23/COM	PMC	Commercial	Dual	Sub-Miniature Twinax
CCII/1553/PMC/1/23/IND	PMC	Industrial	Dual	Sub-Miniature Twinax
CCII/1553/PMC/1/23/RGD	PMC	Ruggedised	Dual	Sub-Miniature Twinax
CCII/1553/PMC/1/BP/CC	CCPMC	Ruggedised	Dual	PMC Connector Pn4

1 : One of RT, BC or BM, denoting Remote Terminal, Bus Controller or Bus Monitor

2 : One of P, R, W or FL, specifying the connecting keying for Channel A

3 : One of P, R, W or FL, specifying the connecting keying for Channel B

For example : CCII/1553/PMC/BM/PFL/COM is a Bus Monitor with P keying on Channel A and FL keying on Channel B.