


► 8-Channel and New Generation 4-Channel Ultra High-Speed Serial I/O Adapters

The 8-Channel and New Generation 4-Channel Ultra High-Speed Serial I/O Adapters provide eight or four channels of simultaneous, high-speed (>20 Mbps), bi-directional serial communications. All channels are jumper configurable as RS232/422/485. These adapters also support a number of UART (Universal Asynchronous Receiver/Transmitter) (<1 Mbps) channels. The adapters are available in the following industry standard compliant formfactors :

- PMC
 - Air-cooled PMC adapter with frontpanel I/O (IEEE Std 1386.1-2001)
 - Conduction-Cooled PMC (CCPMC) adapter with backplane I/O (ANSI/VITA 20-2001)
 - Conduction-Cooled PMC adapter with frontpanel I/O (requires modification to host carrier)
- PCI-104 (PCI-104 v2.0)
- PCI (PCI Local Bus Specification Rev. 2.3)

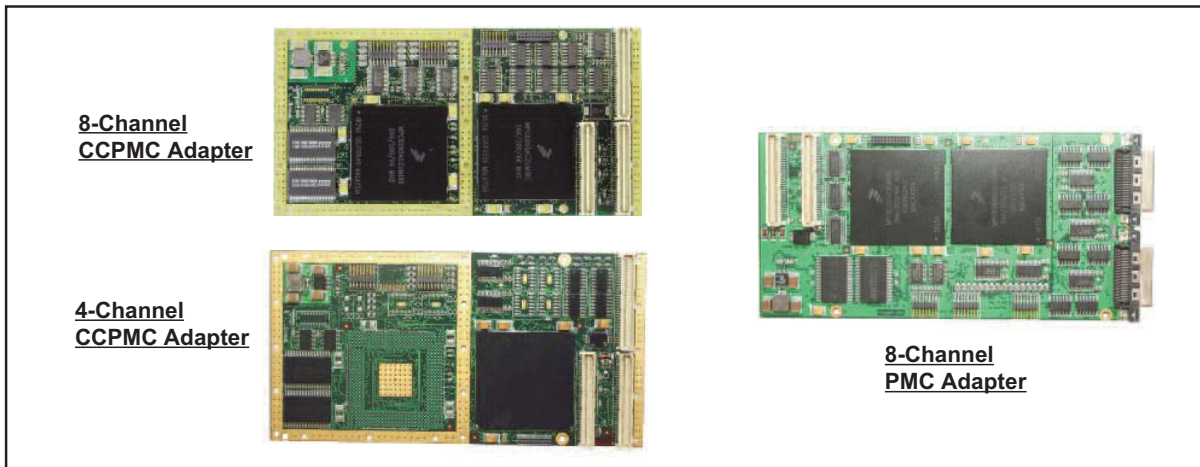

Architecture

The 8-Channel and New Generation 4-Channel Ultra High-Speed Serial I/O Adapters are intelligent adapters designed with Motorola PowerQUICC II Integrated PowerPC Microprocessors as communication controllers. The PowerQUICC II processor can easily be configured to implement different serial protocols, thus allowing the adapters to keep up with technological advances. All ultra high-speed serial I/O channels are implemented using the PowerQUICC II.

Features

- Cost-effective and flexible option for systems that require both high-speed, real-time communication links as well as some low-speed serial links
- Offers independent I/O processing offboard the host

Conduction-Cooling

The conduction-cooled 8-Channel and New Generation 4-Channel Ultra High-Speed Serial I/O PMC Adapter conforms to the CCPMC (Conduction-Cooled PCI Mezzanine Card) Standard, namely ANSI/VITA 20-2001.

Applications

- Distributed real-time applications in harsh environments
- Mission-critical applications
- Avionics
- Vetronics
- High-speed sensor integration



► **8-Channel and New Generation 4-Channel Ultra High-Speed Serial I/O Adapters**

Bus Interface	32 bit, 33 / 66 MHz Electrically : PCI Rev. 2.1, 3,3 V signalling (some versions 3,3 V and 5 V)		
I/O Addresses	Automatically assigned to the slot by PCI Rev. 2.1 Plug-and-Play		
Interrupts	PCI INT A		
DMA	Automatic depending on PCI slot		
Serial I/O Interface	SCC Channels		SMC Channels
	RS-232 : TxD, RxD, RTS, CTS, CD CLK_IN, CLK_OUT		RS-232 : RxD, TxD
	RS-422/485 : TxD, RxD, CLK_IN, CLK_OUT		
EEPROM	EEPROM for board ID (Plug-and-Play) and configuration options		
Protocols	<ul style="list-style-type: none"> - HDLC - SDLC - Async - BiSync 		
Power	3,3 V at 1,3 A; 5 V at 1 mA (5V PCI version only); 12 V at 1 mA		
MTBF	Figures according to MIL-HDBK-217F, Parts Stress Method		
	Commercial and Industrial Grades, 4-Channel Adapter	Ground Benign, Controlled, 25 C	790 000 hours
	Commercial and Industrial Grades, 8-Channel Adapter	Ground Benign, Controlled, 25 C	570 000 hours
	Ruggedised and Conduction-Cooled Grades, 4-Channel Adapter	Ground, Mobile, 45 C	80 000 hours
		Naval, Sheltered, 40 C Airborne, Inhabited Cargo 55 C	190 000 hours 86 000 hours
Ruggedised and Conduction-Cooled Grades, 8-Channel Adapter	Ground, Mobile, 45 C	52 000 hours	
	Naval, Sheltered, 40 C Airborne, Inhabited Cargo 55 C	126 000 hours 56 000 hours	
CPU	Motorola PowerQUICC II Intergrated PowerPC Microprocessor		
Termination	100 ohm (individually selectable for each SCC channel).		
Bit Rates	Serial I/O Clocking	RS-232	RS-422/485
	Synchronous Mode	1 Mbps	20 Mbps
	Asynchronous Mode	1 Mbps	6,25 Mbps
Software Drivers	Various software drivers offered including for VxWorks, Linux, Windows NT, Windows 2000* and Windows XP* operating systems as standard; others are costed options. (*Standard PC HAL (Hardware Abstraction Layer) only)		
Supporting Software	Sample software driver usage (C/C++ source code).		
Special Optional Services	Synchronous Bandwidth Allocation (SBA) and End Station Support (ESS), Built-in Test (BIT), Network Time Protocol (NTP), Network Time Services (NTS).		

8 & 4-Channel UHS Serial

Board-Level



► 8-Channel and New Generation 4-Channel Ultra High-Speed Serial I/O Adapters

Environmental Specifications					
Grade	Commercial	Industrial	Ruggedised		
Temperature - Operating - Storage	0 C to +55 C -40 C to +85 C	-15 C to +75 C -40 C to +85 C	-40 C to + 85 C -55 C to +125 C		
Humidity	0% - 90%	0% - 95%	0% - 95%		
Shock	N/A	30 g peak for 11 ms	40 g peak for 11 ms		
Vibration - Sine - Random	2 g (peak) at 10 Hz to 100 Hz 0,04 g²/Hz at 15 Hz to 2 kHz	10 g (peak) at 5 Hz to 2 kHz 0,1 g²/Hz at 15 Hz to 2 kHz	10 g (peak) at 5 Hz to 2 kHz 0,1 g²/Hz at 15 Hz to 2 kHz		
Physical Characteristics					
Formfactor	Dimensions			Mass	
PMC (IEEE Std 1386.1-2001)	149,00 mm x 74,00 mm (+ 0,0 / -0,5 mm), conforming to CMC height envelope.			90 g +/- 10 g	
CCPMC (ANSI/VITA 20-2001)	143,75 mm x 74,00 mm (+ 0,0 / -0,5 mm), conforming to VITA 20 height envelope			80 g +/- 10 g	
PCI-104 (PCI-104 v1.0)	95,89 mm x 90,17 mm x 23,80 mm (+ 0,0 / -0,5 mm)			85 g +/- 10 g	
PCI (PCI Local Bus Specification Rev. 2.1)	175,26 mm x 106,68 mm x 15,24 mm (+ 0,0 / -0,5 mm)			125 g +/- 10 g	
Part Designations					
Part Number	Formfactor	Grade	Nr of SCC	Nr of SMC	PCI VIO
CCII/UHS/PMC/8P/FP3/COM	PMC	Commercial	8 x RS-232/422/485	4 x RS-232	3,3 / 5,0 V
CCII/UHS/PMC/8P/FP3/IND	PMC	Industrial	8 x RS-232/422/485	4 x RS-232	3,3 / 5,0 V
CCII/UHS/PMC/8P/FP3/RGD	PMC	Ruggedised	8 x RS-232/422/485	4 x RS-232	3,3 / 5,0 V
CCII/UHS/PMC/8P/BP/CC	CCPMC	Conduction-Cooled	8 x RS-232/422/485	0	3,3 V
CCII/UHS/PMC/4PN/FP3/COM	PMC	Commercial	4 x RS-232/422/485	2 x RS-232	3,3 / 5,0 V
CCII/UHS/PMC/4PN/FP3/IND	PMC	Industrial	4 x RS-232/422/485	2 x RS-232	3,3 / 5,0 V
CCII/UHS/PMC/4PN/FP3/RGD	PMC	Ruggedised	4 x RS-232/422/485	2 x RS-232	3,3 / 5,0 V
CCII/UHS/PMC/4PN/BP/CC	CCPMC	Conduction-Cooled	4 x RS-232/422/485	0	3,3 V
CCII/UHS/PC104/8P/FP3/COM	PC104	Commercial	2 x RS-232/422/485 6 x RS-422/485	4 x RS-232	3,3 / 5,0 V
CCII/UHS/PC104/8P/FP3/IND	PC104	Industrial	2 x RS-232/422/485 6 x RS-422/485	4 x RS-232	3,3 / 5,0 V
CCII/UHS/PC104/8P/FP3/RGD	PC104	Ruggedised	2 x RS-232/422/485 6 x RS-422/485	4 x RS-232	3,3 / 5,0 V
CCII/UHS/PC104/4PN/FP3/COM	PC104	Commercial	2 x RS-232/422/485 2 x RS-422/485	2 x RS-232	3,3 / 5,0 V
CCII/UHS/PC104/4PN/FP3/IND	PC104	Industrial	2 x RS-232/422/485 2 x RS-422/485	2 x RS-232	3,3 / 5,0 V
CCII/UHS/PC104/4PN/FP3/RGD	PC104	Ruggedised	2 x RS-232/422/485 2 x RS-422/485	2 x RS-232	3,3 / 5,0 V
CCII/UHS/PCI/8P/FP3/COM	PCI	Commercial	8 x RS-232/422/485	4 x RS-232	3,3 / 5,0 V
CCII/UHS/PCI/8P/FP3/IND	PCI	Industrial	8 x RS-232/422/485	4 x RS-232	3,3 / 5,0 V
CCII/UHS/PCI/4PN/FP3/COM	PCI	Commercial	4 x RS-232/422/485	2 x RS-232	3,3 / 5,0 V
CCII/UHS/PCI/4PN/FP3/IND	PCI	Industrial	4 x RS-232/422/485	2 x RS-232	3,3 / 5,0 V

8 & 4-Channel UHS Serial

Board-Level