

Installation information : CCII/FDDI/PMC/DAS/SC

FDDI PMC Adapter when fitted with SC Connectors

Addendum to :

CCII/FDDI/6-MAN/008 - Installation Guide for the FDDI Adapter



1 PMC FDDI Adapter Front Panel : Addendum

Figure 1 shows the front panel of the CCII/FDDI/PMC/DAS/SC Adapter.

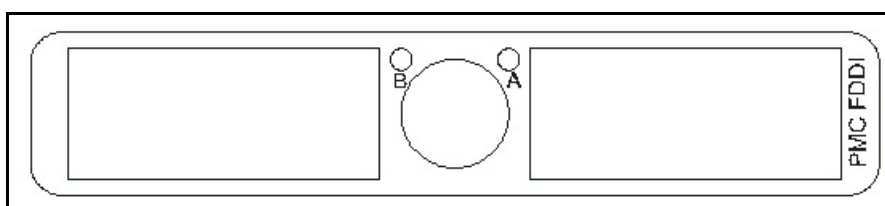


Figure 1 : CCII/FDDI/PMC/DAS/SC Front Panel

2 Installation of the Protocol Drivers : Addendum

Use the following table to determine the status of your network connection :

Note : With a SAS adapter, the DAS LED does not apply in the following table.

SAS	DAS	Explanation
B	A	
Off	Off	Driver not loaded, adapter not operational.
Yellow	Yellow	Station management code is running, adapter is not connected to the network (for example, cable is disconnected).
Green	Off	SAS: adapter is ready for use (connected to network and operational). PMC DAS: adapter active at Port B.
Off	Green	SAS: driver not loaded, adapter not operational. PMC DAS: adapter active at Port A.
Green	Green	Adapter is ready for use (connected to network and operational).

Table 1

CCII/FDDI/6-MAN/009	2014-03-14	Issue 1.0
P:\FDDI\TECHMAN\CFDMAN09.wpd		Page 1 of 1