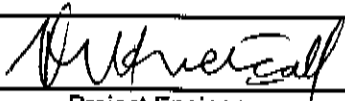




**User Manual**  
for the  
**C<sup>2</sup>I<sup>2</sup> Systems**  
**FDDI and CDDI Adapters**

<b>C<sup>2</sup>I<sup>2</sup> Systems Document No.</b>	CCII/FDDI/6-MAN/008
<b>Document Issue</b>	1.5
<b>Issue Date</b>	2016-06-02
<b>Print Date</b>	2016-06-02
<b>File Name</b>	P:\FDDI\TECH\MAN\CFDMAN08.wpd
<b>Distribution List No.</b>	DN 0383

© C<sup>2</sup>I<sup>2</sup> Systems The copyright of this document is the property of C<sup>2</sup>I<sup>2</sup> Systems. The document is issued for the sole purpose for which it is supplied, on the express terms that it may not be copied in whole or part, used by or disclosed to others except as authorised in writing by C<sup>2</sup>I<sup>2</sup> Systems.

## Signature Sheet

Name	Signature	Date
Completed by  H C H METCALF	 Project Engineer Board-Level Products C <sup>2</sup> P Systems	2016-06-02
Accepted by  W. DE LUCA	 Project Manager Board-Level Products C <sup>2</sup> P Systems	2016-06-02
Accepted by  H C H METCALF	 Quality Assurance C <sup>2</sup> P Systems	2016-06-03

## Amendment History

Issue	Description	Date	ECP No.
1.1	Second Official Release	1998-11-27	-
1.2	Third Official Release. Updated to latest Template.	2002-10-30	RF 0025
1.3	Pin-outs for Frontpanel CDDI Adapters Added	2003-02-28	CCII/FDDI/6-ECP/013
1.4	Pin-outs for PC-104 Adapter Added	2005-10-21	CCII/FDDI/6-ECP/025
1.5	Improve document naming consistency, address change	2016-06-02	CCII/FDDI/6-ECP/035

# Contents

<b>1. Scope</b>	<b>1</b>
1.1 Introduction	1
1.2 System Overview	1
<b>2. Applicable and Reference Documents</b>	<b>2</b>
2.1 Applicable Documents	2
2.2 Reference Documents	2
<b>3. General Information</b>	<b>3</b>
3.1 The Adapter Kit	3
3.2 Handling Instructions	3
3.3 Items Required to Install the Adapter	3
3.3.1 Cables	3
3.3.2 HCC Requirements	4
3.3.2.1 PMC Adapter	4
3.3.2.2 PCI-104	4
3.3.3 Documentation	4
3.3.4 Software	5
<b>4. Installation of the Adapter</b>	<b>6</b>
4.1 Installation Overview	6
4.2 Testing with Loop-Back Cables / Wrap Plugs for Transceiver Tests	6
4.2.1 Fibre SAS	6
4.2.2 Fibre DAS	7
4.2.3 Copper SAS	7
4.2.4 Copper DAS	7
4.3 Testing with or without Loop-Back Cables / Wrap Plugs for Transceiver Tests	7
4.3.1 Test Failure	8
4.4 Attach the Adapter to Your Network	9
4.5 Connector Identification	9
4.5.1 PMC FDDI Adapter, DAS, ST Connectors	9
4.5.2 PMC FDDI Adapter, DAS, Reversed ST Connectors	10
4.5.3 PMC FDDI Adapter, DAS, SC Connectors	11
4.5.4 PMC CDDI Adapter, DAS, HR-10 Connectors	12
4.5.5 PC-104	13
<b>5. Installation of the Protocol Drivers</b>	<b>14</b>
<b>6. Contact Details</b>	<b>15</b>
6.1 Contact Person	15
6.2 Physical Address	15
6.3 Postal Address	15
6.4 Voice and Electronic Contacts	15
6.5 Product Support	15

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page iv of vi

**Annexure A** ..... 16  
    Data Sheet ..... 16  
**Annexure B** ..... 17  
    Pin Assignments ..... 17

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page v of vi

## List of Figures

Figure 1 : ST Connector .....	3
Figure 2 : HR10A Connector .....	4
Figure 3 : HR10A Wrap Plug .....	4
Figure 4 : FDDI SAS Loop-Back .....	6
Figure 5 : FDDI DAS Loop-Back .....	7
Figure 6 : Typical Message Screen of the Diagnostic Program .....	8
Figure 7 : Typical Error Message Screen of the Diagnostic Program .....	8
Figure 8 : PMC FDDI DAS ST Connector Identification .....	9
Figure 9 : PMC FDDI DAS ST Frontpanel Layout .....	9
Figure 10 : PMC FDDI DAS ST-1 Connector Identification .....	10
Figure 11 : PMC CDDI DAS SC Connector Identification .....	11
Figure 12 : PMC FDDI DAS SC Frontpanel Layout .....	11
Figure 13 : PMC CDDI DAS HR10 Connector Identification .....	12
Figure 14 : PMC CDDI DAS HR10 Frontpanel Layout .....	12
Figure 15 : PC-104 Connector Identification .....	13
Figure 16 : Pin Locations .....	17

## Abbreviations and Acronyms

CDDI	Copper Distributed Data Interface
DAC	Dual Attachment Concentrator
DAS	Dual Attachment Station
FDDI	Fibre Distributed Data Interface
HCC	Host Carrier Card
Mbit/s	Megabits per second
OBS	Optical Bypass Switch
PCI	Peripheral Component Interconnect
PMC	Peripheral Component Interconnect Mezzanine Card
SAC	Single Attachment Concentrator
SAS	Single Attachment Station

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page vii of vi

1. **Scope**

1.1 Introduction

This document is the User Manual for the C<sup>2</sup>I<sup>2</sup> Systems Fibre Distributed Data Interface (FDDI) and Copper Distributed Data Interface (CDDI) Adapters.

1.2 System Overview

The Peripheral Component Interconnect (PCI) Mezzanine Card (PMC) FDDI adapters attach Host Carrier Cards (HCC) to 100 Mbit/s Fibre Distributed Data Interface (FDDI) networks using fibre optic cable.

The PMC CDDI adapters attach HCCs to 100 Mbit/s Copper Distributed Data Interface (CDDI) networks using copper twisted pair cable.

At present, the range of C<sup>2</sup>I<sup>2</sup> Systems FDDI and CDDI adapters covers the PMC (PCI Mezzanine Connector) and the PCI-104 bus architecture.

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page 1 of 17



2. **Applicable and Reference Documents**

2.1 Applicable Documents

2.1.1 CCII/FDDI/6-MAN/002, *User Manual for the FDDI Adapter 4.3 BSD VxWorks Software Driver.*

2.1.2 CCII/FDDI/6-MAN/003, *Generic User Manual for the FDDI Adapter VxWorks BIT Application.*

2.2 Reference Documents

2.2.1 CCII/FDDI/6-MAN/001, *User Manual for the FDDI Adapter VxWorks Enhanced Network Software Driver.*

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page 2 of 17

3. **General Information**

3.1 The Adapter Kit

The adapter kit consists of the following items :

- Cardboard Package
- Electrostatic Discharge (ESD) Protective Bag
- the Adapter
- screws as required
- CD containing User Manuals, Installation Guides and Drivers

If any item is missing or damaged, contact C<sup>2</sup>I<sup>2</sup> Systems.

Please refer to the Release Notes on the diskette for the latest information regarding this product.

3.2 Handling Instructions

Follow strict ESD handling procedures. Failure to do so may result in damage to the adapter. Do not open the ESD protective package containing the adapter until you are prompted to do so.

3.3 Items Required to Install the Adapter

3.3.1 Cables

Fibre	FDDI Single Attachment Station (SAS) adapter	One duplex optic fibre patch lead or two optic fibre cables with the appropriate FDDI ST or SC connectors.
	FDDI Dual Attachment Station (DAS) adapter	Two duplex optic fibre patch leads or four optic fibre cables with the appropriate FDDI ST or SC connectors.
Copper	CDDI SAS adapter	One twisted pair patch lead with HR10A connectors. Testing of transceivers will also require one HR10A wrap plug (see Figure 3)
	CDDI DAS adapter	Two twisted pair patch leads with HR10A connectors. Testing of transceivers will also require two HR10A wrap plugs (see Figure 3).

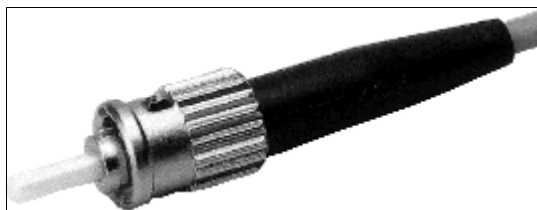


Figure 1 : ST Connector

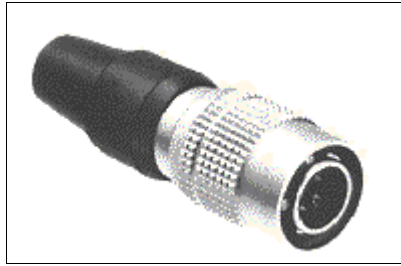


Figure 2 : HR10A Connector

HR10A Connector as seen from front (socket) side

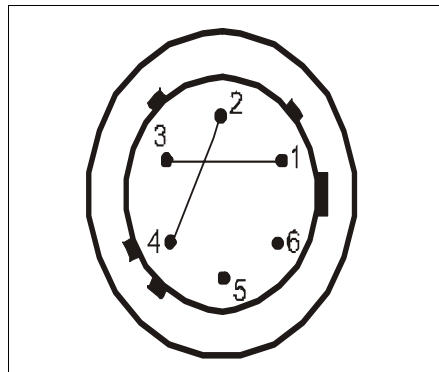


Figure 3 : HR10A Wrap Plug

Note : These cables are not provided with the adapter.

### 3.3.2 HCC Requirements

Note : The HCC should be correctly configured before you proceed with the adapter installation. Refer to the documentation for the specific HCC.

#### 3.3.2.1 PMC Adapter

An HCC equipped with at least one empty PMC expansion slot is required to host a PMC FDDI or CDDI Adapter.

#### 3.3.2.2 PCI-104

A stable PCI-104 system is required to host a PCI-104 FDDI or CDDI Adapter.

### 3.3.3 Documentation

- this Installation Guide
- the Documentation provided for the HCC

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page 4 of 17

### 3.3.4 Software

- the Software Driver for the FDDI Adapter - in some instances this is included with the Operating System (Linux, Windows)
- at least one of the operating systems supported by the HCC and the FDDI Adapter drivers
- for a full listing of Operating Systems and Drivers supported please refer to the installation disks and/or the web site located at (<http://www.cci.co.za/>).

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page 5 of 17

## 4. Installation of the Adapter

### 4.1 Installation Overview

If you are testing a previously installed adapter, skip to Step 5. The installation of the adapter requires the completion of the following steps:

- prepare the HCC for installation of a PMC or PC-104 adapter
- install the adapter
- reinstall the HCC and reconnect the cables if required
- restart and configure the HCC
- connect loop-back cables / wrap plugs for transceiver tests
- test the adapter
- attach the adapter to your network

Refer to the documentation for the HCC.

There are two ways to test the adapter :

- a test with loop-back covering all devices including the transceiver
- a test without loop-back covering all devices except the transceiver

### 4.2 Testing with Loop-Back Cables / Wrap Plugs for Transceiver Tests

#### 4.2.1 Fibre SAS

Connect a fibre cable as shown in Figure 4. You may have to remove process plugs from the transceiver if the adapter is being used for the first time.

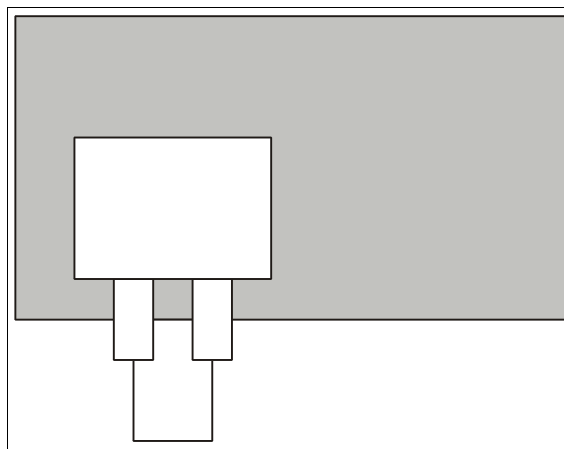


Figure 4 : FDDI SAS Loop-Back

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page 6 of 17

#### 4.2.2 Fibre DAS

Connect two fibre cables as shown in Figure 5. You may have to remove process plugs from the transceivers if the adapter is being used for the first time.

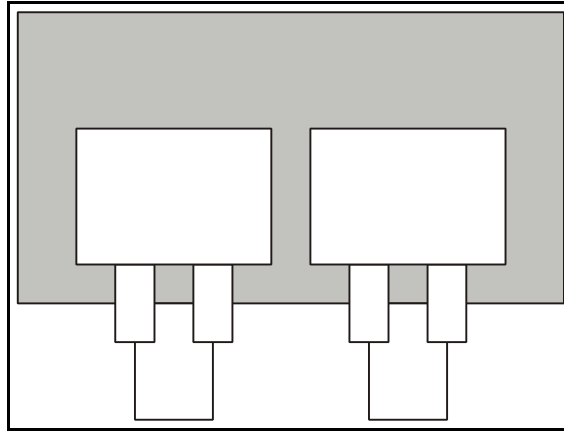


Figure 5 : FDDI DAS Loop-Back

#### 4.2.3 Copper SAS

Connect a single HR10A wrap plug (shown in Figure 3).

#### 4.2.4 Copper DAS

Connect two HR10A wrap plugs (shown in Figure 3).

#### 4.3 Testing with or without Loop-Back Cables / Wrap Plugs for Transceiver Tests

The test executable is available for DOS (SKFPDIAG.EXE) and VxWorks (ccFdBit.a).

To run the VxWorks test software, follow the instructions in Generic User Manual for the FDDI VxWorks BIT Application [2.1.2].

To test the adapter using DOS, follow these steps :

1. Boot with DOS and wait until the operating system is loaded and the DOS prompt is displayed on the screen. If you are not able to initiate DOS or if the DOS prompt does not appear, check your configuration.
2. Insert the Driver Installation Diskette (that has been delivered with the adapter) in diskette drive A.
3. For PMC adapters, type in :  

```
cd a: [Press Enter ]  
SKFPDIAG [Press Enter ]
```
4. When the Main Menu of the diagnostic program is displayed, select by using the arrow keys to highlight the option and pressing the <Enter> key.
  - "Diagnostics" if you want to perform the test without Loop-Back-back or
  - "Diagnostics with Loop-back" if you want to perform the test with loop-back

Several tests are performed. This will take 1 to 4 minutes. After all the tests are run, a message is displayed.

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page 7 of 17

```

SK-NET FDDI-FE DIAGNOSTICS
VDS not installed      Single attachment station
Output none           Streaming Data disabled
IO Port 0x000 Slot 0 IRQ 9 ARB 9 Fairness on FEPROM inactive

```

---

<pre> Exit Diagnostics Diagnostics with Loop-Back FEPROM </pre>	<pre> Board register check.....passed Onboard time check .....passed Onboard memory check.....passed DMA engine check.....passed LAN interface check.....passed Throughput Test.....passed *** All tests passed successfully *** </pre>
---	---

Figure 6 : Typical Message Screen of the Diagnostic Program

If an error occurs, follow the instructions given in the message displayed on the screen. Please check configuration and run the test again.

```

SK-NET FDDI-FE DIAGNOSTICS
VDS not installed      Single attachment station
Output none           Streaming Data disabled
IO Port 0x000 Slot 0 IRQ 9 ARB 9 Fairness on FEPROM inactive

```

---

<pre> Exit Diagnostics Diagnostics with Loop-Back FEPROM </pre>	<pre> Board register check.....passed Onboard time check .....passed Onboard memory check.....passed DMA engine check.....failed </pre>
---	---

Figure 7 : Typical Error Message Screen of the Diagnostic Program

Press any key to continue.

If all tests pass, continue with Step 7.

#### 4.3.1 Test Failure

If an error message instructs you to reset the adapter, follow the procedure listed below :

1. Turn off the computer.
2. Make sure that the adapter is completely seated. You do not have to remove the adapter. Just lift the adapter so that the adapter connector and the connector on the PMC HCC are clear of each other. Press firmly on the adapter until it is seated correctly.
3. Repeat the test. If the problem persists, contact C<sup>2</sup>I<sup>2</sup> Systems.
4. To quit the Diagnostics Program, select the Exit bar in the Main Menu and press the <Enter> key.
5. If applicable, remove the wrap plug. Reconnect the cable to the network.

6. If you do not intend to connect the system to the FDDI network right now, reinsert the process plug into the optic transceiver. The process plug will protect the optic transceiver from dust accumulation.

#### 4.4 Attach the Adapter to Your Network


The SAS adapter supports single attachment to a concentrator.

The DAS adapter supports either dual attachment to the main ring path or dual homing to one or two concentrators.


#### 4.5 Connector Identification

##### 4.5.1 PMC FDDI Adapter, DAS, ST Connectors

Figure 8 shows the location of network connectors on the PMC FDDI Adapter with ST Connectors, as seen from the component side of the adapter. Figure 9 shows the frontpanel layout.

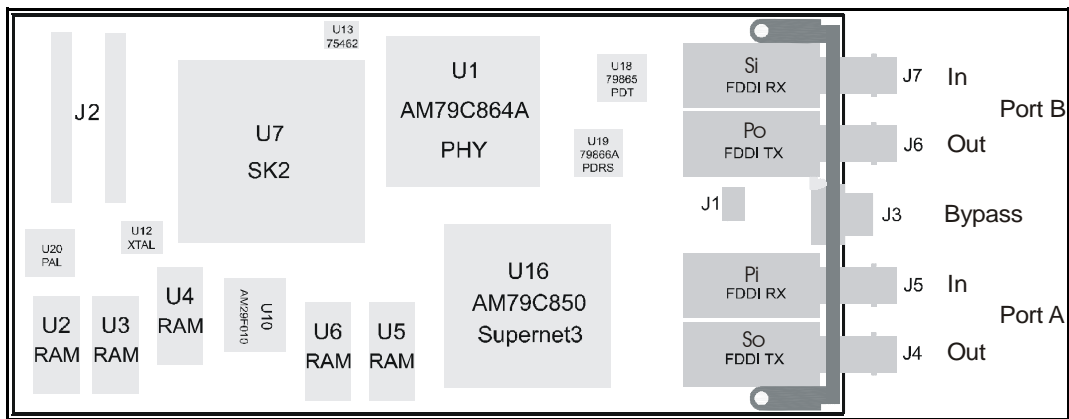

**Figure 8 : PMC FDDI DAS ST Connector Identification**

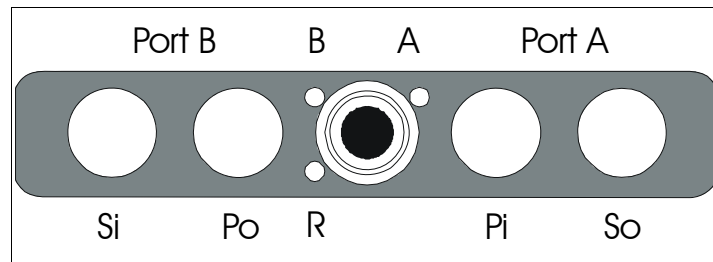

**Figure 9 : PMC FDDI DAS ST Frontpanel Layout**

Note :  
 Pi = Primary In  
 Si = Secondary In  
 Po = Primary Out  
 So = Secondary Out

Refer to Annexure B for Optical Bypass Pin-outs.

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page 9 of 17



4.5.2 PMC FDDI Adapter, DAS, Reversed ST Connectors

Figure 10 shows the location of network connectors on the PMC FDDI Adapter with reversed ST Connectors, as seen from the track side of the adapter.

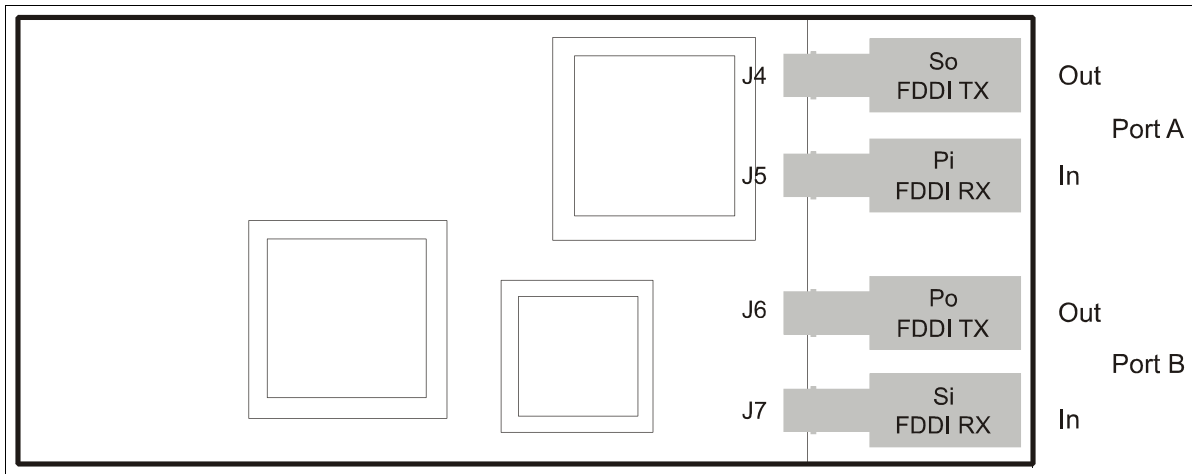


Figure 10 : PMC FDDI DAS ST-1 Connector Identification

### 4.5.3 PMC FDDI Adapter, DAS, SC Connectors

Figure 11 shows the location of network connectors on the PMC FDDI Adapter with SC Connectors, as seen from the component side of the adapter. Figure 12 shows the frontpanel layout.

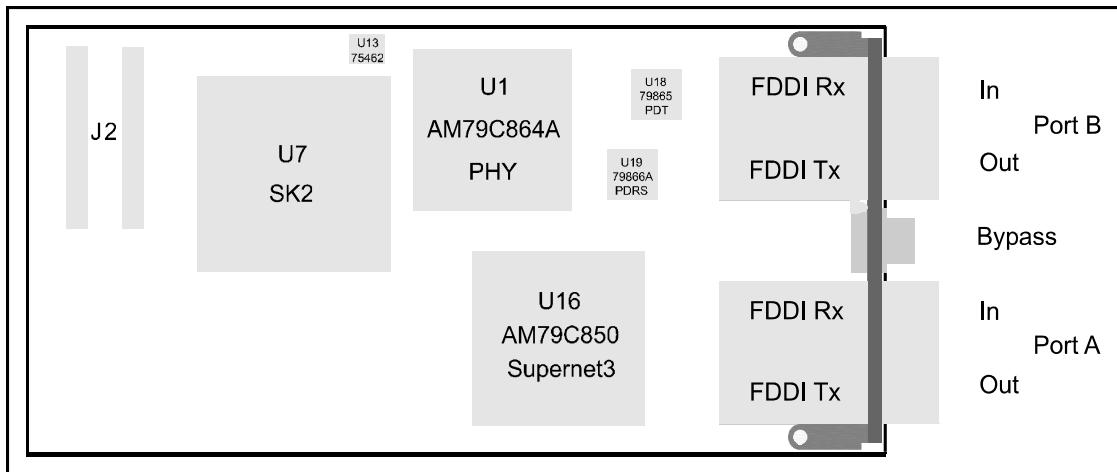


Figure 11 : PMC CDDI DAS SC Connector Identification

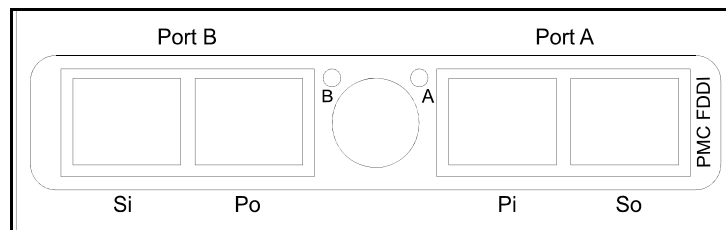


Figure 12 : PMC FDDI DAS SC Frontpanel Layout

Note :  
 Pi = Primary In  
 Si = Secondary In  
 Po = Primary Out  
 So = Secondary Out

Refer to Annexure B for Optical Bypass Pin-outs.

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page 11 of 17

#### 4.5.4 PMC CDDI Adapter, DAS, HR-10 Connectors

Figure 13 shows the location of network connectors on the PMC CDDI Adapter with HR-10 Connectors, as seen from the component side of the adapter. Figure 14 shows the frontpanel layout.

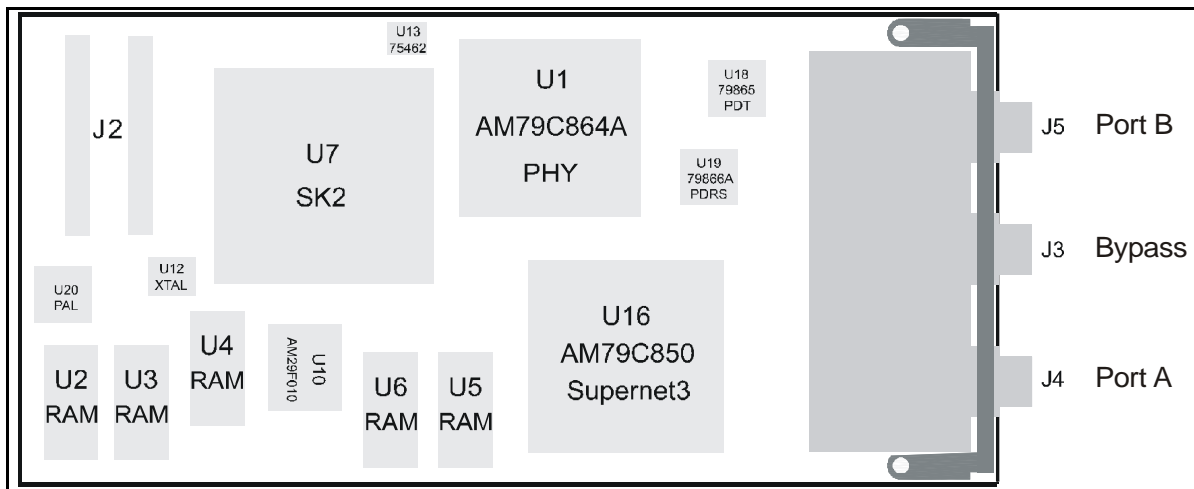


Figure 13 : PMC CDDI DAS HR10 Connector Identification

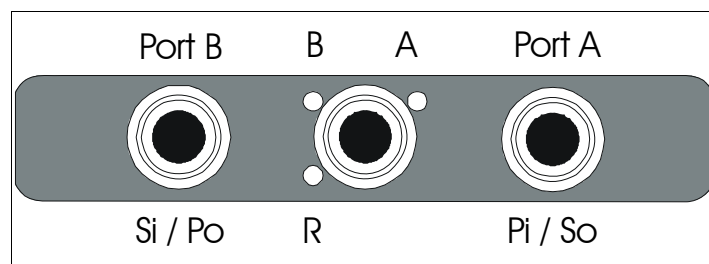


Figure 14 : PMC CDDI DAS HR10 Frontpanel Layout

Note :  
 Pi = Primary In  
 Si = Secondary In  
 Po = Primary Out  
 So = Secondary Out

Refer to Annexure B for Channel and Optical Bypass Pin-outs.

4.5.5 PC-104

Figure 15 shows the location of network connectors on the PC-104 FDDI Adapter with ST Connectors.

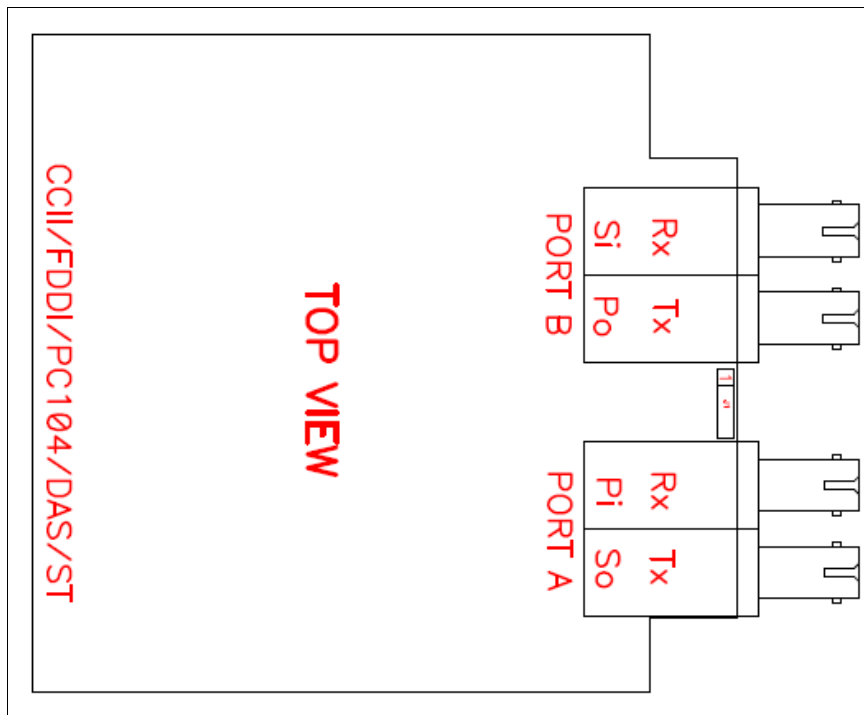


Figure 15 : PC-104 Connector Identification

Optical Bypass Switch (OBS)

Connector Pin Assignments :

- 1 - OBS Switch
- 2 - OBS Vcc
- 3 - OBS Available
- 4 - GND

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page 13 of 17

## 5. Installation of the Protocol Drivers

For the DOS protocol drivers, complete installation instructions are given in readme files on the Installation Diskettes. Look for the .TXT files stored in the sub-directory of the corresponding driver on the Installation Diskettes.

Installation instructions for the VxWorks protocol drivers are in the Generic User Manual for the FDDI 4.3 BSD VxWorks Software Driver [2.1.1].

Once the driver is installed and loaded, the adapter is ready for use.

Use one of the following tables to determine the status of your network connection :

Note : With a SAS adapter, the DAS LED does not apply in the following tables.

SAS		DAS	Adapters with Three LEDs
Green (B)	Yellow (R)	Green (A)	
Off	Off	Off	Driver not loaded, adapter not operational.
Off	On	Off	Station management code is running, adapter is not connected to the network (for example, cable is disconnected).
On	Off	On	SAS: adapter is ready for use (connected to network and operational). PMC DAS: adapter active at Channel B.
Off	Off	On	SAS: driver not loaded, adapter not operational. PMC DAS: adapter active at Channel A.
On	Off	On	Adapter is ready for use (connected to network and operational).

SAS	DAS	Adapters with Two LEDs
B	A	
Off	Off	Driver not loaded, adapter not operational.
Yellow	Yellow	Station management code is running, adapter is not connected to the network (for example, cable is disconnected).
Green	Off	SAS: adapter is ready for use (connected to network and operational). PMC DAS: adapter active at Channel B.
Off	Green	SAS: driver not loaded, adapter not operational. PMC DAS: adapter active at Channel A.
Green	Green	Adapter is ready for use (connected to network and operational).

6. **Contact Details**

6.1 Contact Person

Direct all correspondence and / or support queries to the Project Manager at C<sup>2</sup>I<sup>2</sup> Systems.

6.2 Physical Address

C<sup>2</sup>I<sup>2</sup> Systems  
Real-Time House, Block T  
Greenford Office Estate  
Punters Way  
7708 Kenilworth  
Cape Town  
South Africa

6.3 Postal Address

C<sup>2</sup>I<sup>2</sup> Systems  
P.O. Box 171  
7701 Rondebosch  
South Africa

6.4 Voice and Electronic Contacts

Tel : (+27) (0)21 683 5490  
Fax : (+27) (0)21 683 5435  
Email : [info@ccii.co.za](mailto:info@ccii.co.za)  
Email : [support@ccii.co.za](mailto:support@ccii.co.za)  
URL : <http://www.ccii.co.za/>

6.5 Product Support

Support on C<sup>2</sup>I<sup>2</sup> Systems products is available telephonically between Monday and Friday from 09:00 to 17:00 CAT. Central African Time (CAT = GMT + 2).

---

CCII/FDDI/6-MAN/008	2016-06-02	Issue 1.5
CFDMAN08.wpd		Page 15 of 17

# Annexure A

## Data Sheet

Part Numbers	CCII/FDDI/PMC/DAS/SC/(COM/IND/RGD) CCII/FDDI/PMC/DAS/ST/(COM/IND/RGD) CCII/FDDI/PMC/DAS/ST-1/MIL CCII/CDDI/PMC/DAS/HR10/(COM/IND/RGD) CCII/FDDI/PC104/DAS/ST/(COM/IND/RGD)
Bus Interface	32-bit PCI-Bus electrical, complies to PCI Rev 2.1 PMC formfactor, complies to CMC IEEE P1386.1
Network Interface (Fibre)	ANSI X3T9.5 and X3T12 compatible
LAN Controller	AMD SUPERNET 3
RAM	128 kBytes CMOS static
Flash EPROM	128 kBytes
I/O Addresses	Automatic by PCI V2.1 Plug and Play assigned to the slot
Interrupts	PCI INT A (depending on HCC PMC slot)
DMA	Automatic depending on PCI slot
Arbitration Level	---
Timer	3 channels at 6,25 MHz max.
Dimensions	149 mm x 74 mm x 13,5 mm
Power Requirements	< 1,45 A at 5 V
Environmental Specifications	-15 C to +75 C (operating) -40 C to +75 C (storage) 95% non-condensing relative humidity Shock 6 g peak amplitude, 11 ms duration, half sine wave pulse
Drivers	Refer to <a href="http://www.cci.co.za/">http://www.cci.co.za/</a> for driver support.
Supporting Tools	Refer to <a href="http://www.cci.co.za/">http://www.cci.co.za/</a> for support tools.

## Annexure B

### Pin Assignments

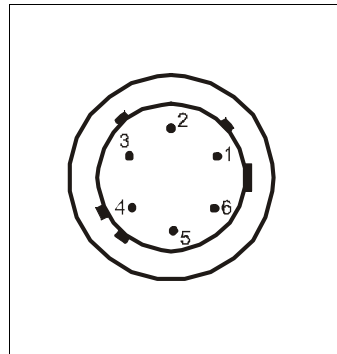


Figure 16 : Pin Locations

#### B.1 **Optical Bypass Switch Receptacle**

Pin 1 : VCC  
Pin 2 : VCC  
Pin 3 : Switch secondary ring  
Pin 4 : Switch primary ring  
Pin 5 : Ground  
Pin 6 : Switch Present

#### B.2 **Frontpanel CDDI Adapter Receptacle**

Pin 1 : TxD+  
Pin 2 : TxD-  
Pin 3 : RxD+  
Pin 4 : RxD-  
Pin 5 : Not connected  
Pin 6 : Not connected